

# Pervious Concrete Pavement




## Minimum Measure: Post Construction Stormwater Management in New Development and Redevelopment

### Subcategory: Infiltration



CDS ASSOCIATES, INC.  
Knowledge ■ Expertise ■ Innovation

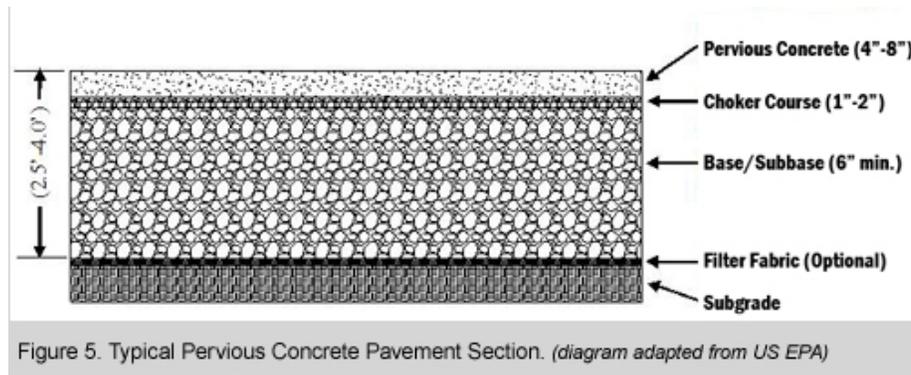

### Description

Pervious concrete is concrete with reduced sand or fines and allows water to drain through it. Pervious concrete over an aggregate storage bed will reduce stormwater runoff volume, rate, and pollutants. The reduced fines leave stable air pockets in the concrete and a total void space of between 15 and 35 percent. The void space allows stormwater to flow through the concrete, and enter a crushed stone aggregate bedding layer and base that supports the concrete while providing storage and runoff treatment. When properly constructed, pervious concrete is durable, low maintenance, and has a low life cycle cost.

### Applicability

Pervious concrete allows for runoff volume and rate control, plus pollutant reductions. Projects use pervious concrete to meet post-construction stormwater quantity and quality requirements. The use of pervious concrete can potentially reduce additional expenditures and land consumption for conventional stormwater collection, conveyance, and detention infrastructure. It also has a naturally brighter surface than traditional asphalt, which will reduce lighting needs and increase nighttime safety. Pervious concrete can replace traditional impervious pavement for most pedestrian and vehicular applications except high-volume/high-speed roadways. Pervious concrete can be designed to handle heavy loads, but surface abrasion from constant traffic will cause the pavement to deteriorate more quickly than conventional concrete. Pervious concrete has performed successfully in pedestrian walkways, sidewalks, driveways, parking lots, and low-volume roadways.

### Design Criteria

Pervious concrete should be designed and sited to intercept, contain, filter, and infiltrate stormwater on site. Several design possibilities can achieve these objectives. For example, pervious concrete can be installed across an entire street width or an entire parking area. The pavement can also be installed in combination with impermeable pavements or roofs to infiltrate runoff. Several applications use pervious concrete in parking lot lanes or parking stalls to treat runoff from adjacent impermeable pavements and roofs. This design economizes pervious concrete installation costs while providing sufficient treatment area for the runoff generated from impervious surfaces. Inlets can be placed in the pervious concrete to accommodate overflows from extreme storms. The stormwater volume to be captured, stored, infiltrated, or harvested determines the scale of permeable pavement required.

Pervious concrete (4 to 8 inches) comprises the surface layer of the permeable pavement structure which consists of the following:

# Pervious Concrete Pavement



1818



CDS ASSOCIATES, INC.  
Knowledge • Expertise • Innovation

- *Choke course* - This permeable layer is typically 1 - 2 inches thick and provides a level bed for the pervious concrete. It consists of small-sized, open-graded aggregate.
- *Open-graded base reservoir* - This aggregate layer is immediately beneath the choke layer. The base is typically 3 - 4 inches thick and consists of crushed stones typically 3/4 to 3/16 inch. Besides storing water, this high infiltration rate layer provides a transition between the bedding and subbase layers.
- *Open-graded subbase reservoir* - The stone sizes are larger than the base, typically 2½ to 2¾ inch stone. Like the base layer, water is stored in the spaces among the stones. The subbase layer thickness depends on water storage requirements and traffic loads. A subbase layer may not be required in pedestrian or residential driveway applications. In such instances, the base layer is increased to provide water storage and support.
- *Underdrain (optional)* - In instances where pervious concrete is installed over low-infiltration rate soils, an underdrain facilitates water removal from the base and subbase. The underdrain is perforated pipe that ties into an outlet structure. Supplemental storage can be achieved by using a system of pipes in the aggregate layers. The pipes are typically perforated and provide additional storage volume beyond the stone base.
- *Geotextile (optional)* - This can be used to separate the subbase from the subgrade and prevent the migration of soil into the aggregate subbase or base.
- *Subgrade* - The layer of soil immediately beneath the aggregate base or subbase. The infiltration capacity of the subgrade determines how much water can exfiltrate from the aggregate into the surrounding soils. The subgrade soil is generally not compacted.

## Maintenance

The most prevalent maintenance concern is potential clogging of the pervious concrete pores. Fine particles that can clog the pores are deposited on the surface from vehicles, the atmosphere, and runoff from adjacent land surfaces. Clogging will increase with age and use. While more particles become entrained in the pavement surface, it does not become impermeable. Studies of the long-term surface permeability of pervious concrete and other permeable pavements have found high infiltration rates initially, followed by a decrease, and then leveling off with time. With initial infiltration rates of hundreds of inches per hour, the long-term infiltration capacity remains high even with clogging. When clogged, surface infiltration rates usually well exceed 1 inch per hour, which is sufficient in most circumstances for the surface to effectively manage intense stormwater events. Permeability can be increased with vacuum sweeping. In areas where extreme clogging has occurred, half inch holes can be drilled through the pavement surface every few feet or so to allow stormwater to drain to the aggregate base. Many large cuts and patches in the pavement will weaken the concrete structure. Freeze/thaw cycling is a major cause of breakdown for conventional pavements, especially for parking lots in northern climates. Properly constructed permeable concrete can last 20 to 40 years because of its ability to handle temperature impacts.

In cold climates, sand should not be applied for snow or ice conditions. However, snow plowing can proceed as with other pavements and salt can be used in moderation. Pervious concrete has been found to work well in cold climates as the rapid drainage of the surface reduces the occurrence of freezing puddles and black ice. Melting snow and ice infiltrates directly into the pavement facilitating faster melting. Cold weather and frost penetration do not negatively impact surface infiltration rates. Permeable concrete freezes as a porous medium rather than a solid block because permeable pavement systems are designed to be well-drained; infiltration capacity is preserved because of the open void spaces. However, plowed snow piles should not be left to melt over the pervious concrete as they can receive high sediment concentrations that can clog them more quickly.

## Effectiveness

Permeable pavement reduces pollutant concentrations through several processes. The aggregate filters the stormwater and slows it sufficiently to allow sedimentation to occur. Also, studies have found that in addition to beneficial treatment from bacteria in the soils, beneficial bacteria growth has been found on established aggregate bases. In addition, permeable pavement can process oil drippings from vehicles.

Permeable pavement water quantity and pollutant reduction characteristics such as 80% total suspended solids reductions can qualify it to earn credits under green or sustainable building evaluations systems such as Leadership in Energy and Environmental Design (LEED®) and Green Globes.